


Concrete pump


Output up to 91 m³/h
 Delivery pressure up to 106 bar

BSA 1405 -E BSA 1408 -E BSA 1409 -D

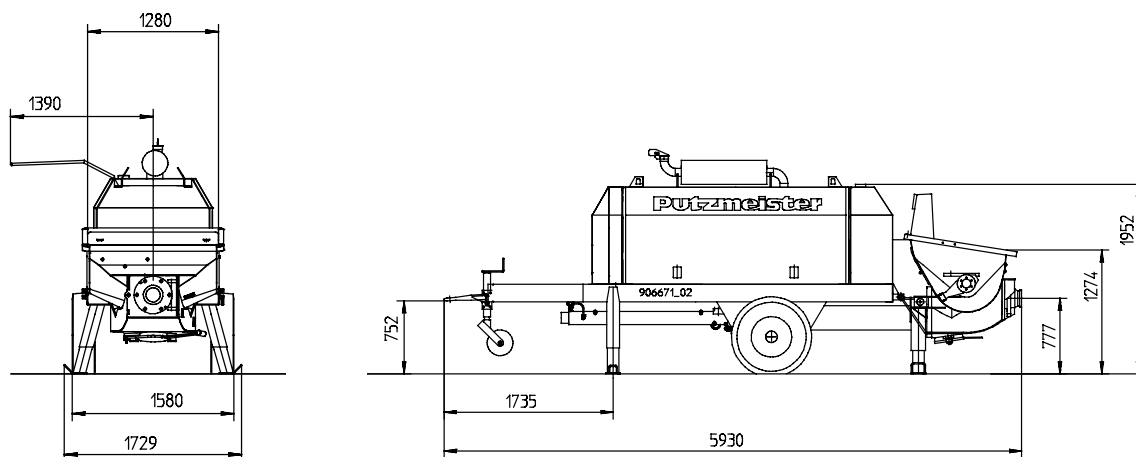

Note: Standard version. Dimensions and weights depend on equipment.

Performance diagram

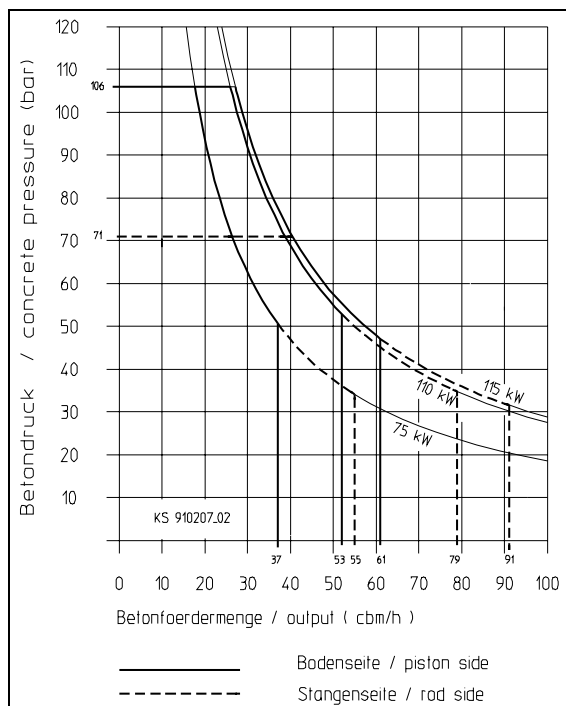

Technical data for concrete pump


Model	BSA	1405 -E	1408 -E	1409 -D
Material number		101134.008	101135.007	101112.004
Output	m ³ /h	55 / 37 *	79 / 53 *	91 / 61 *
Delivery pressure	bar	71 / 106 *		
Delivery cylinder	∅ mm	200		
Delivery cyl. stroke	mm	1400		
Strokes / minute		21 / 14 *	30 / 20 *	32 / 21 *
Engine / motor power	kw	75 **	110 **	115
Hopper Capacity	l	RS 900 600		
Filling height	m	approx. 1.3		
Transfer tube		S 2015 D		
Pressure connection		6"		
Control system		Free-Flow Hydraulics (FFH)		
Weight	kg	4200		4600

* Values for hydraulic fluid being fed to piston-side.

** Electric motor with 50 Hz
 Electric motor with 60 Hz approx 20% more output / stokes

All data maximum theoretical.

Site example: BSA and stationary boom

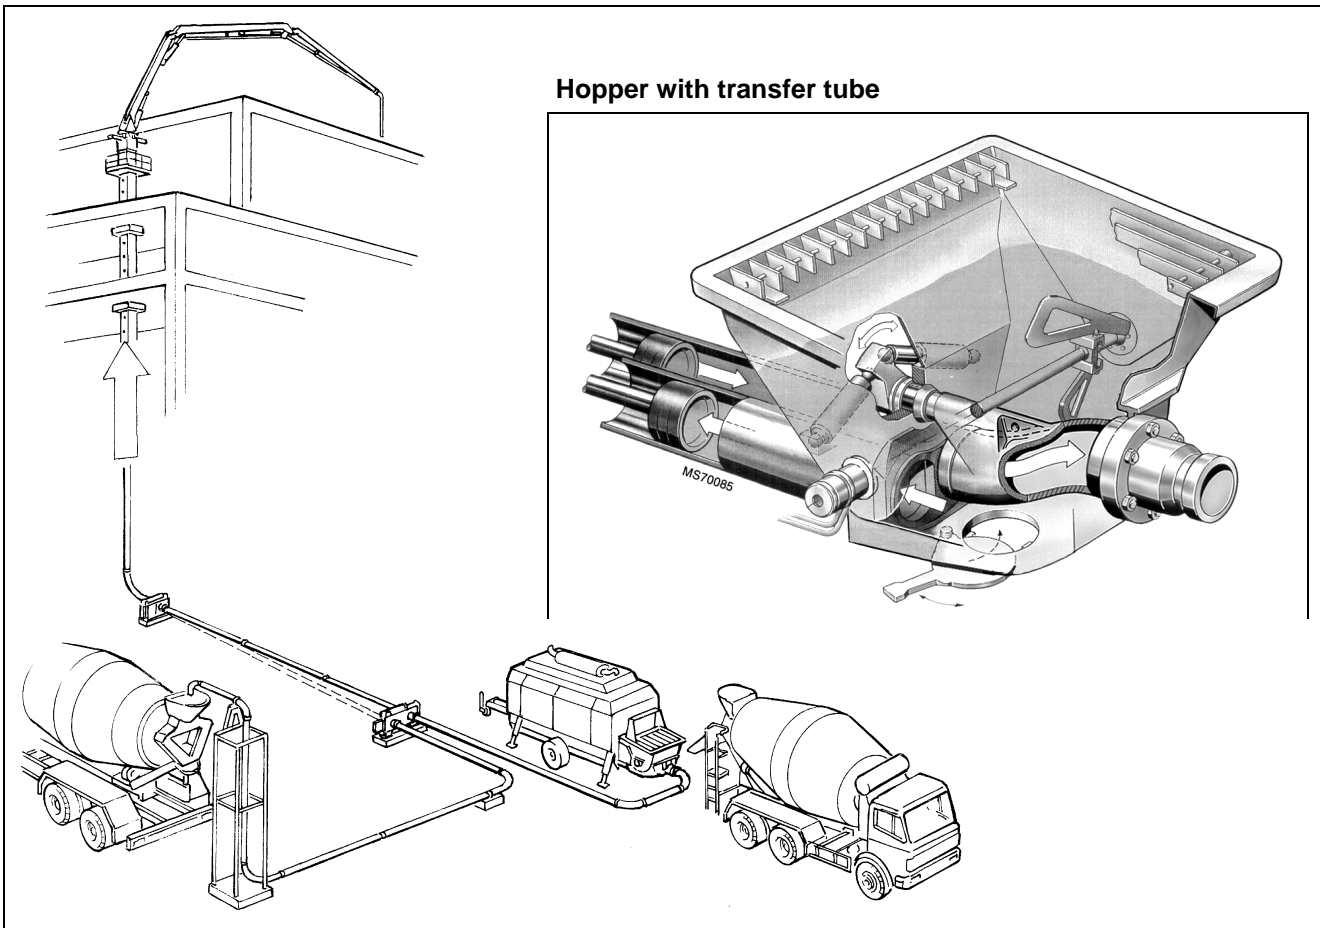

Delivery scope

- Agitator safety switch off
- Cast wear parts, highly wear resistant
- Central lubrication strip hopper
- Cleaning accessories
- Concrete hopper with agitator
- Coupling ring (DIN)
- Drive electric 75 kW (BSA 1405 -E)
- Drive electric 110 kW (BSA 1408 -E)
- Drive diesel, Deutz 115 kW (BSA 1409 -D)
- Grill 70 mm
- Gate valve connection on pump
- Operating manuals 2 x cert. and spare part lists
- Painting: MB 1227 chrome yellow
- Remote control with 10 m cable
- Set of tools
- Side flaps 2x incl. CE Kit:
- cover over switch cylinder
- Splash guard
- Square outriggers 4x mech.15°-slanging
- Support wheel on towbar incl. transport protection
- trailer F 8, can be driven on job site
- Standard accessories

Optional extras

On request

Please see quotation for exact delivery scope.