
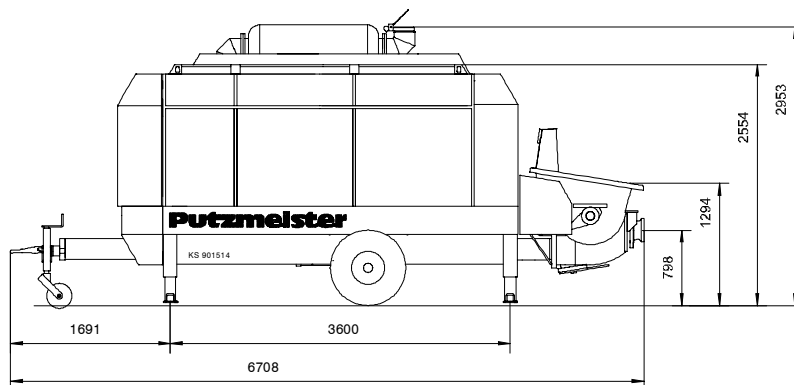


# Concrete pump


# BSA 14000 HP

Output up to 200 m<sup>3</sup>/h  
 Delivery pressure up to 260 bar

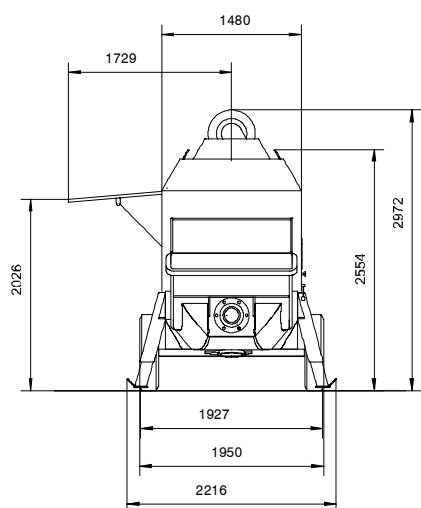

Note: Standard version. Dimensions and weights depend on equipment.

### Performance diagram

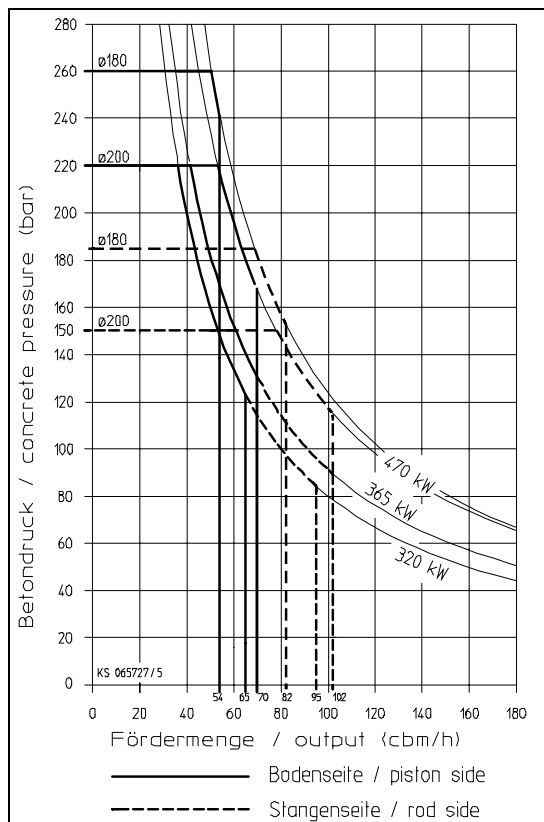

### Technical data for concrete pump

Model	BSA	14000 HP -D	14000 HP -D	14000 HP -E	14000 HP -D
Material number		101744.003	101745.002	100809.004	100870.004
Output	m <sup>3</sup> /h	82/54*	102/70*	95/65*	200/139*
Delivery pressure	bar	185/260*	150/220*		79/115*
Delivery cylinder	∅ mm	180	200		280
Delivery cyl. stroke	mm	2100			
Strokes / minute		26 / 17 *	26 / 18 *	24 / 17 *	26 / 18 *
Engine / motor power	kW	365 **	365 **	320 ***	365 **
Hopper		RS 900HP			RS 900M
Capacity	l	600			600
Filling height	m	approx. 1.3			approx. 1.3
Transfer tube		S 1812 D	S 2015 D		S 2318
Pressure connection		6"			8"
Control system		Free-Flow Hydraulics (FFH)			
Weight	kg	9600			10000


\* Values for hydraulic fluid being fed to piston-side.

\*\* Engine power 470 kW

\*\*\* Electric motor with 50 Hz  
 Electric motor with 60 Hz approx 20% more output / stokes

All data maximum theoretical.

## Site example: BSA and stationary boom

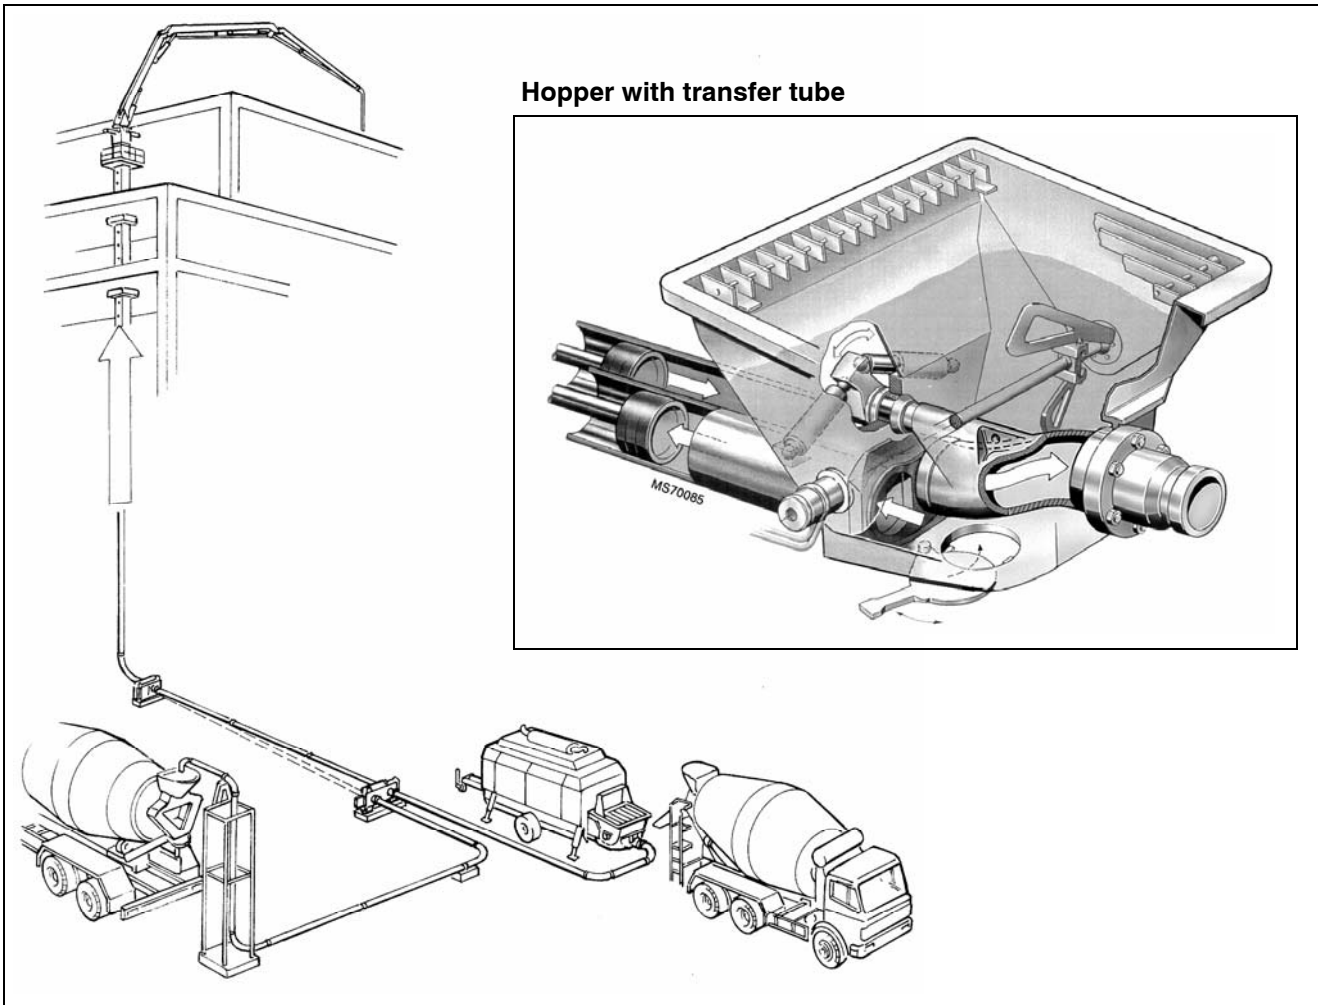

### Delivery scope

- Agitator safety switch off
- CE-Kit
- Cleaning accessories
- Concrete hopper with agitator
- Coupling ring (DIN)
- Drive Diesel, CAT 365 kW (BSA 14000 HP -D)
- Drive electric 2x160 kW (BSA 14000 HP -E)
- Gate valve connection on pump
- Grill 70 mm
- Operating manuals 2x cert. and spare part lists
- Painting: MB 1227 chrome yellow
- Remote control with 10 m cable
- Set of tools
- Set-up foot hydr.
- Side flaps 6x
- Splash guard
- Square outriggers 4x mech. 15°-slanging
- Support wheel on towbar incl. transport protection
- Trailer F 8, can be driven on job site
- Wear parts, hard metal

### Optional extras

- Drive Diesel, CAT 470 kW (BSA 14000 HP -D)
- Drive electric 2x200 kW (BSA 14000 HP -E)

On request

Please see quotation for exact delivery scope.